


**Druckluft-Sicherheits-
kupplung**

**Compressed Air Safety
Coupling**

SERIE 32
SERIES 32

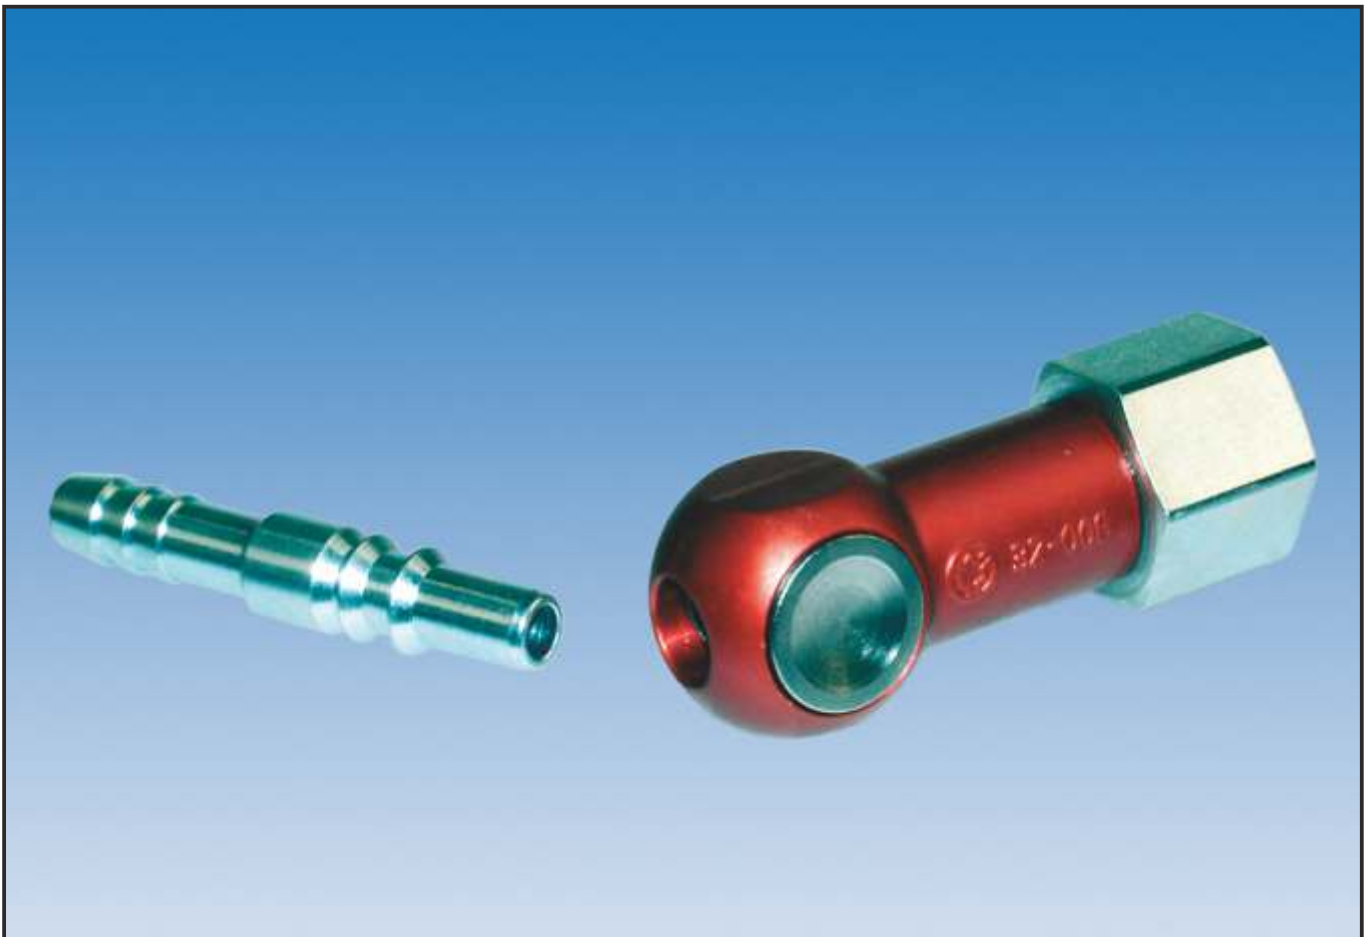

Serie 32 Series 32

Druckluft-Sicherheitskupplung Compressed Air Safety Coupling



Beschreibung:

Bewährte und robuste Sicherheitskupplung mit Verriegelungsautomatik, die mit einem Druckknopf entkuppelt wird. Einmaliges Drücken schließt das Ventil und entlüftet die Nippelseite von anstehendem Druck. Eine zweite Betätigung des Druckknopfes gibt den Nippel frei.*

Ausführung / Technische Daten:


Kupplungsgehäuse: Aluminium rot eloxiert
 Druckknopf u. Führungsteile: Stahl vernickelt
 Anschlüsse u. Stecknippel: Stahl verzinkt
 Dichtungen: FKM
 P_{max} zul. stat. bei 20 °C: 20 bar
 Cv-Wert Type 32-006/ DN 6: 0,82
 Cv-Wert Type 32-009/ DN 9: 2,55
 Armaturen sind frei von lackverlaufstörenden Substanzen
 *Entspricht den Forderungen nach DIN EN ISO 4414 (vormals DIN EN 983)

Description:

Well-proven and solid safety push coupling with automatic lock, to be disconnected with a push-button. The valve is closed by pressing once the button, thus the adaptor side is ventilated and releases the pressure. A second actuation of the button unfreezes the adaptor.*

Materials / Technical data:

Coupling housing: Aluminium, red anodised
 Button and guide components: Nickel-plated steel
 Connections and thru type adaptors: Zinc-plated steel
 Seals: FKM
 P_{max} statically admissible at 20 °C: 20 bar / 290 psi
 Cv value type 32-006, DN 6: 0,82
 Cv value type 32-009, DN 9: 2,55
 The couplings are free of enamel flow disturbing substances.
 *In compliance with DIN EN ISO 4414 (previous DIN EN 983)

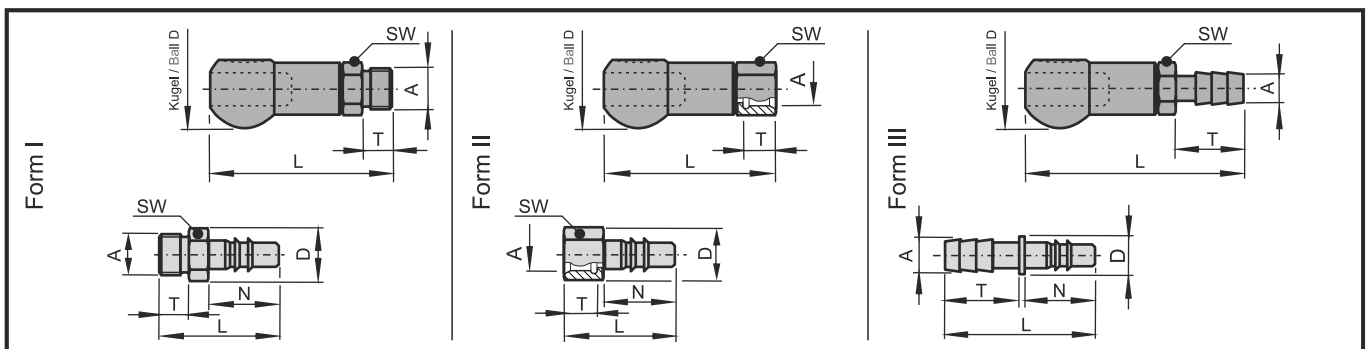

Wka - 07/2014

	Bestellnummer / Part number	Anschluss / Connection A	Form	D Ø [mm]	SW [mm]	L [mm]	T [mm]	N [mm]
Verschlusskupplung Self sealing coupling	32-006-0-WR013-36-2-FL	G 1/4 A	I	32	19	74,5	11	
	32-006-0-WR017-36-2-FL	G 3/8 A	I	32	19	75,5	12	
	32-006-0-WR021-36-2-FL	G 1/2 A	I	32	22	78,5	15	
	32-006-0-WR513-36-2-FL	G 1/4	II	32	19	73,5	13	
	32-006-0-WR517-36-2-FL	G 3/8	II	32	22	74,5	14	
	32-006-0-SL009-36-2-FL	9 mm	III	32	19	93,5	30	
Stecknippel Thru type adaptor	32-006-1-WR013-11-FL	G 1/4 A	I	21,1	19	56,5	11	37
	32-006-1-WR017-11-FL	G 3/8 A	I	21,1	19	57,5	12	37
	32-006-1-WR517-11-FL	G 3/8	II	24,4	22	56	14	37
	32-006-1-SL006-11-FL	6 mm	III	12		62	25	37
	32-006-1-SL009-11-FL	9 mm	III	12		67	30	37
	32-006-1-SL013-11-FL	13 mm	III	16		72	30	37
Verschlusskupplung Self sealing coupling	32-009-0-WR021-36-2-FL	G 1/2 A	I	38	25	89,5	15	
	32-009-0-WR521-36-2-FL	G 1/2	II	38	27	99,5	17	
	32-009-0-SL013-36-2-FL	13 mm	III	38	25	104,5	30	
Stecknippel Thru type adaptor	32-009-1-WR521-11-FL	G 1/2	II	30,1	27	63	17	42
	32-009-1-SL013-11-FL	13 mm	III	20		77	30	42

WALTHER-PRÄZISION Carl Kurt Walther GmbH & Co. KG

Hausadresse / Head office: Postadresse / Postal address:
 Westfalenstraße 2 Postfach 420444
 42781 Haan, Germany 42404 Haan, Germany
 Telefon: +49 (0) 21 29 567-0 eMail: info@walther-praezision.de
 Telefax: +49 (0) 21 29 567-450 Internet: www.walther-praezision.de



**walther
präzision**