


**Quick
Connect Coupling
for manual
operation**

**HP
SERIES**

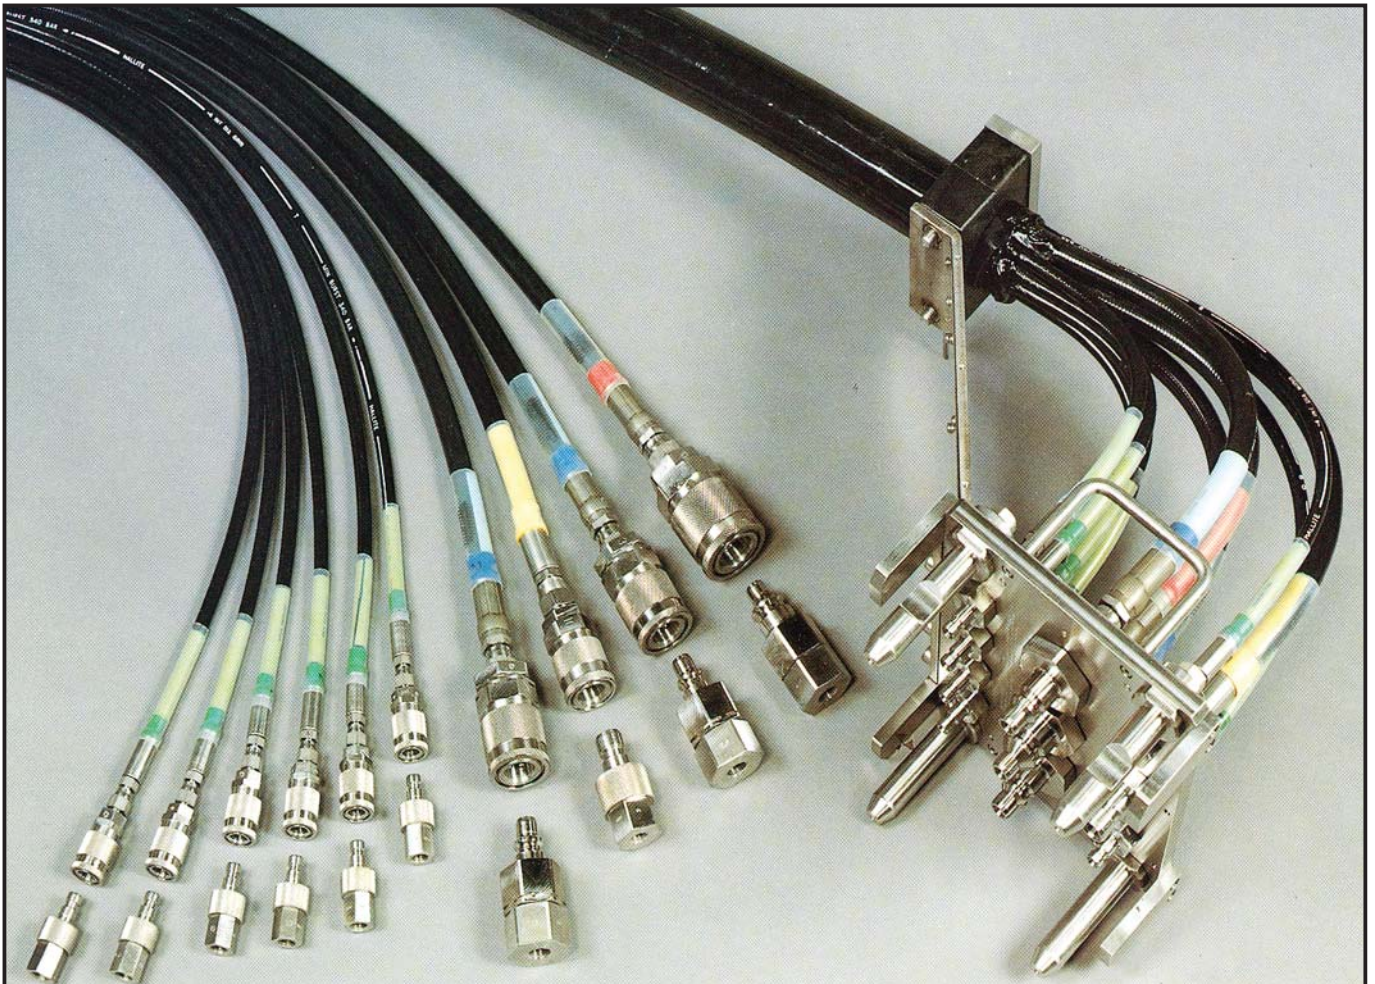


Quick Connect Coupling for manual operation • HP Series

Features:

- Up to 2000 bar working pressure
- Over 20 years, field proven subsea use
- Rugged and reliable construction
- Low force design
- Wide variety of body and seal materials available for special applications
- Optional 8 way mechanical non- interchangeability coding for all sizes
- Pressure venting feature available in both male and female half

Material:

Stainless Steel 1.4418, Monel

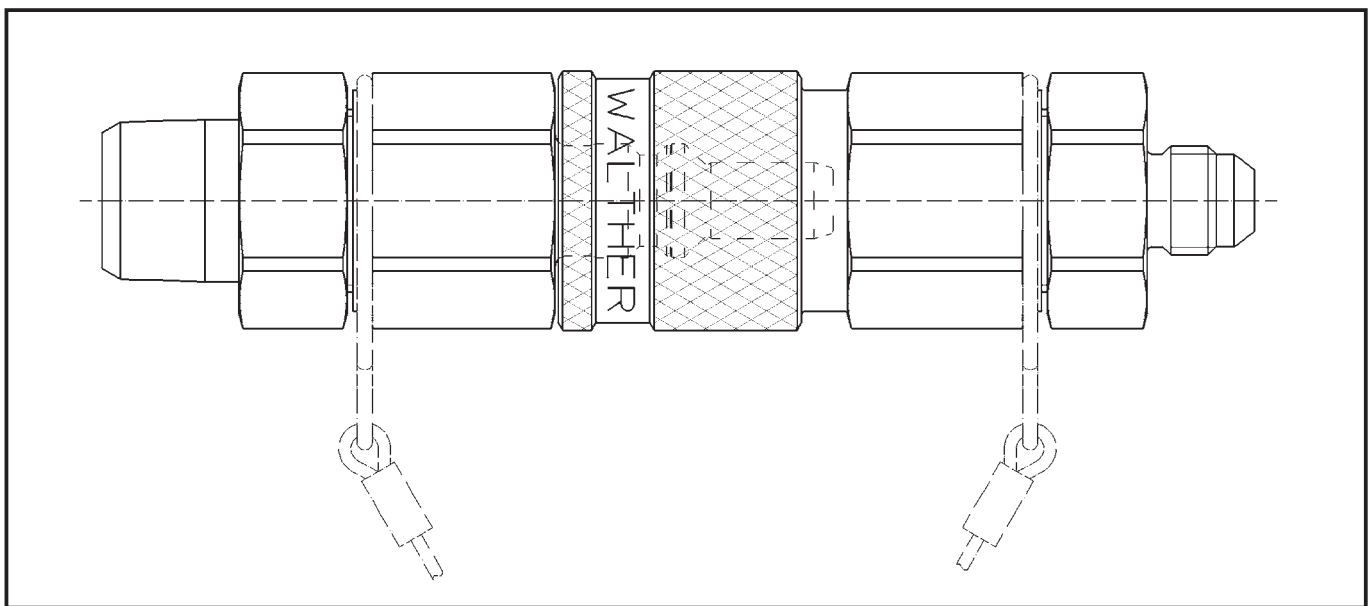

WALTHER-PRÄZISION • WKa rev. 08/2004 - subjekt to alterations

Bore	Type	Pressure Rating bar / psi		Approx. CV value	End Connection
		Steel	Stainless Steel		
4 mm	HP-004	2,000 / 29,000	1,000 / 14,500	0.24	Can be specified
6 mm	HP-006	1,400 / 14,500	690 / 10,000	0.56	Can be specified
10 mm	HP-010	600 / 8,700	470 / 6,815	1.85	Can be specified
16 mm	HP-016	500 / 7,250	450 / 6,525	5.50	Can be specified
20 mm	HP-020	400 / 5,800	350 / 5,075	8.50	Can be specified
32 mm	HP-032	300 / 4,350	250 / 3,625	20.0	Can be specified

WALTHER-PRÄZISION

Carl Kurt Walther GmbH & Co. KG

Hausadresse / Head office:

Westfalenstraße 2
42781 Haan, Germany

Telefon: +49 (0) 21 29 567-0
Telefax: +49 (0) 21 29 567-450

Postadresse / Postal address:

Postfach 420444
42404 Haan, Germany

eMail: info@walther-praezision.de
Internet: www.walther-praezision.de

